

Fast-track floor prep system for all resilient and carpets

- Instant dry floor levelling of most substrates
- A cost effective solution to problem floors
- Exceptionally stable, free floating underlay system
- Provides a super smooth finish
- Ready for glue-down of all resilient and carpets
- Most suitable over floor heating
- Quick and easy to fit and to handle

Jumpax® Basic instantly provides a very smooth, stable base onto which all resilient floor-coverings and carpets can be laid and glued directly. The twin layers of Jumpax® Basic panels utilise an overlap joint configuration to produce a seamless surface. Jumpax® Basic creates the ideal sub-floor for carpet, linoleum, vinyl, rubber, cork etc.

Jumpax® Basic is very simple to install and much quicker and easier to use than a traditional smoothing compound or plywood. It is also an entirely dry process so it is much cleaner and requires no setting time which allows the flooring to be laid immediately. The very low thermal resistance of Jumpax® Basic makes it ideal to be used over floor heating, enabling your valuable heat energy to pass

quickly and easily through to the surface for a fast warm up time and maximum comfort.

Jumpax® Basic is composed of high quality MDF and the 3 mm baseboards and 4mm topboards are each coated with a special interactive contact adhesive to give a strong, permanent full-surface bond. Strict quality controls during production guarantee excellent results and a trouble-free installation every time. Combined with various UNIFLOOR subfloor materials, Jumpax® Basic fitted out with LVT's, achieves an impact sound reduction of no less than 21 dB L_w!*


* In a floating screed situation, the noise reduction of the composed top floor always depends on the impact noise reduction of floating screed system in place.

Floor levelling and floor fitting within one day!



uniFloor
UNDERLAY SYSTEMS BV

Products specifications

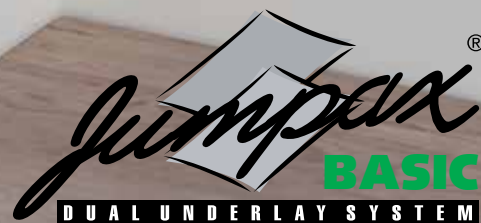

Technical data

Article number	136.400
Thickness / Tolerance (mm)	7 / ± 0,2
Measurement / Tolerance (mm / m ¹)	600 x 1200 / ± 1,5
Weight per m ² (kg)	5,39
Raw material(s) combinations	MDF / interactive adhesive
Density (kg / m ³)	770
Colour	Natural
Bending strength (kg / m ²)	> 40
Impact Sound Reduction EN-ISO 10140-3:2010: with LVT & Heat-Foil®	20 dB ΔL _w
with LVT & Heat-Blok®	21 dB ΔL _w
with CocoFloor®	25 dB ΔL _w
Fire Class, EN 13501:2007 with 2 mm Vinyl	B _{fl-s1}
Fire Class, EN 13501:2007 with 2 mm Linoleum	C _{fl-s1}
Humidity (%)	4 - 10
Swelling after 24 hours in water, max.(%)	< 40
Thermal resistance R _m -value (m ² K.W ⁻¹)	0,047
TOG	0,5
Formaldehyde degree	E- 1

Packaging

Installation instructions	Present
Package contents	4 base- and 4 top-boards / 2,88 m ²
Pallet contents	48 packs / 138,24 m ²
Pallet size (lxbxh mm)	1200 x 1200 x 850
Pallet weight	830 kg

Application

Acoustic, fast track subfloor preparation system for the immediate gluedown of all resilient flooring, carpet and carpet tiles.

Package contents

4/4

- 4 base- and 4 topboards
- 600 x 1200 mm
- 2,88 m²

Thickness 7 mm



Scan the QR-Code for the installation manual of Jumpax® Basic!

Please check www.unifloor.nl/en for the most up-to-date information.



facebook.com/jumpax24



youtube.com/watch?v=lawZNY7l_ig



UK Toll Free Number
T 0845 603 0 906