

1 topboard
baseboard
4 mm
5/32"
4 mm
5/32"
8 mm
5/16"

2 24h
45%-65%
18°C
65°F

3 RH < 75%

4 1 meter
max. 3 mm
3/32"

5 Unifloor alutape
Unifloor PE-foil 150 µm
4 mil

6

7

8

9 side strip

10 base

11 base

12 base

13 base

14 base

15 top

16 top

17 75 kg/165 lbs

18 120 grain sand paper

19 Expansion joints

20 Expansion joints between rooms

21 Heat-foil


22 Unifloor PE-foil 200 µm
4 mil
Heat-blok

23 < 48h

Unifloor Underlay Systems
Arnsbergstraat 4
7418 EZ Deventer - The Netherlands
T +31 (0) 570 85 55 33 - E info@unifloor.nl
UK Toll Free 0845 603 0 906
Service-Line für Deutschland, Österreich & Schweiz:
T +49 (152) 264 111 11
www.unifloor.nl



- ◆ Fast track subfloor preparation for when time is an issue
- ◆ Exceptionally stable free floating underlay system
- ◆ Superb smooth finish, ready for floor covering
- ◆ Instant floor levelling of most substrates
- ◆ Overcomes many substrate problems
- ◆ For the immediate glue-down of vinyl, linoleum, cork, rubber, carpet, etc.
- ◆ Quick and easy to fit and to handle (pack sizes)

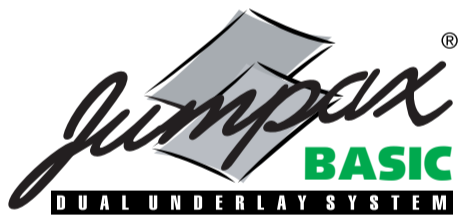

FITTING INSTRUCTION FILM



uniFloor
UNDERLAY SYSTEMS BV

Unifloor Underlay Systems
Arnsbergstraat 4
7418 EZ Deventer - The Netherlands
T +31 (0) 570 85 55 33
E info@unifloor.nl

UK Toll Free 0845 603 0 906
Service-Line für Deutschland,
Österreich & Schweiz:
T +49 (152) 264 111 11

www.unifloor.nl